



FRIGOR TEC
Cooling to the point

FrigorTec GmbH • Germany



CRANEFRIGOR™ – Cooling for containers, crane cabins, and control cabinets

frigortec.com

For business customers only. Not available to consumers.





CRANEFRIGOR™ Container cooling units / control cabinet cooling units		CC02	CC05 / CC08		TY
Dimensions [mm]	Length	415	608	998	670
	Width	506	997	763	530
	Height	1.127	1.640	2.200	1.600
Weight approx. [kg]		90	280	450	180
Nominal cooling capacity [kW] ^{1) 2)} with R134a / R513A		3,4	5,8	11,4	6,4
Heating capacity [kW] ²⁾		–	2,3	5,0	4
CO ₂ -equivalent [kg]	R134a	2.002	3.146	5.720	3.289
	R513A	883	1.388	2.524	1.451
	R450A	–	1.331	2.420	1.391
Air flow rate, free blowing [m³/h]		1.500	1.200	2.000	1.000



CRANEFRIGOR™ Crane cabin cooling units		OC02	TW	OC07	TX
Dimensions [mm]	Length	600	1.050	880	670
	Width	600	730	460	530
	Height	600	630	2.140	1.600
Weight approx. [kg]		90	140	230	180
Nominal cooling capacity [kW] ^{1) 2)} with R134a / R513A		3,5	4,6	6,6	6,4
Heating capacity [kW] ²⁾		2,3	3,5	6,9	4
CO ₂ -equivalent [kg]	R134a	2.002	3.003	2.860	3.289
	R513A	883	1.577	1.262	1.451
	R450A	–	1.512	1.210	1.391
Air flow rate, free blowing [m³/h]		850 ³⁾	800 ³⁾	1.000 ³⁾	1.000 ³⁾

¹⁾ At 27 °C indoor temperature, 52 % rel. indoor air humidity and 35 °C ambient temperature

²⁾ 400 V / 50 Hz (additional operating voltages available)

³⁾ controllable

Refrigerant Type:	GWP value:	Area of application:
R134 a	1.430	Up to 70°C
R513A	631	Up to 70°C
R450A	605	Up to 85°C



CK12 / 18 / 24			CK10 / 16 / 22 / 30				CVD Split	DV Split
1.048	1.148	1.148	2.132				854	916 - 2.116
638	838	838	1.200				1.200	908
1.845	1.945	1.945	960				912	270
410	480	510	590	610	620	620	290	35 - 91
12,3	19,5	24,2	17,9	26,6	31,4	33,5	10 - 20	10 - 30
6,9			6,2/12,3				-	3 - 6
11.440	13.585	18.590	12.870	20.020	24.310	25.740	-	-
5.048	5.994	8.203	5.679	8.834	10.727	11.358		
4.840	5.747	7.865	5.445	8.470	10.285	10.890		
2.500	3.500	4.000	3.500	4.300	6.800	7.000	-	1.850 - 6.420



Filter device	Condensate evaporator	Condensate evaporator
FT15	KVV wall mounting	KV floor and wall mounting
370	605	1.062
370	152	195
480 - 1.170	217	348
Voltages: 24 V DC, 115 V, 230 V	20	30
Possible filter class: G2/G3, M5/F7, chemical filters, activated charcoal filter	-	-
-	2,3 - 3,5	2,3 - 3,5
-	-	-
Volume flow [m ³ /h] ³⁾ : 100-400	-	-



The FrigorTec GmbH is certified with DIN EN ISO 9001 : 2015.

TÜV acceptance testing in our plant.

An additional test at the installation site is not usually necessary for the CRANEFRIGOR™ compact device.



CRANEFRIGOR™ – Air conditioning units, custom-made and in serial production

For over 60 years, FrigorTec has produced crane air conditioning units for container terminals and harbours, as well as for hot areas, such as foundries, steel works, and mills. On the one hand, the devices create optimal working conditions in the cabin for crane drivers; on the other hand, they ensure reliable room temperatures for sensitive performance and control electronics. The devices, which have been put to the test worldwide, are available in many installation variations and with various output stages.

CRANEFRIGOR air conditioning units for cooling containers, crane cabins, and control cabinets, have been specially developed for use in harbours and container terminals. The compact and robust design, and the materials used, make them perfectly suited for small installation spaces, salty air, and constant vibrations. Compact or split devices are also used depending on the profile of requirements.

In the case of a split device (Fig. 1), the condenser unit is installed outside the space to be cooled, with the air conditioning unit inside. The two devices are connected by refrigerant lines. The air conditioning unit is positioned directly above the heat source, making it especially effective. A wide range of individual component combinations allow for an exact output adjustment.

Container/control cabinet cooling

The air conditioning unit is mounted externally on the container wall (Fig. 2). The spatial conditions determine whether a vertical or horizontal design is chosen. In both cases, the device blows cool air from below into the space.




Fig. 1 Procedural principle for container cooling





Fig. 2 Procedural principle for control cabinet cooling

At the top, the heated air is sucked in through a fan and extracted. The air conditioning unit for the control cabinet cooling is mounted directly on the control cabinet. A simple air distribution is also supplied in the case of large or long control cabinets.

Crane cabin cooling

The air conditioning unit for crane cabin cooling is mounted directly on the cabin wall (Fig. 3). It operates very quietly and is easy to operate. In the case of cooling, cold supply air flows underneath the ceiling into the crane cabin. In the case of heating, warm supply air flows above the floor. This provides optimal comfort for the crane driver.

Fig. 3 Procedural principle for crane cabin cooling

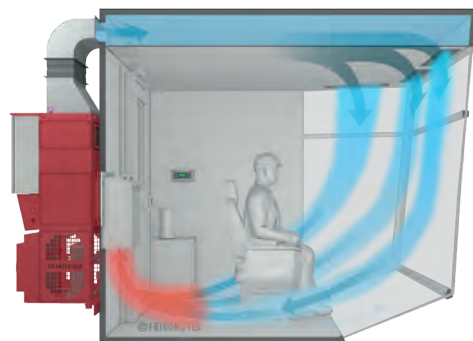

Advantages with FrigorTec air-conditioning units:

- Comfort and safety thanks to air conditioning in the cabin, control cabinet and electronics compartment
- Safe operation under extreme dust and heat loads
- Effective corrosion protection thanks to the sturdy industrial design and protective coating
- Adapted air flow and optimum temperature distribution
- Industrial components with a long service life for continuous 24/7 operation

CRANEFRIGOR™ - Air conditioning units for container/control cabinet and crane cabin cooling

In harbours and container terminals work is often done under extreme conditions:

- high ambient temperatures
- very high air humidities
- a high level of direct sunlight
- salty air
- high level of exhaust pollution
- high noise levels
- vibrations

FrigorTec air conditioning units create a good working environment for your staff as well as for the equipment in use, even under these extreme conditions.

Cooled air for man and machine

The guidelines for workplace conditions are met by air conditioning the crane cabin. Your employees work under comfortable, performance-enhancing conditions.

Similarly, the cranes' sensitive control units must be reliably cooled, as operational safety and the smooth running of the logistics process depend on this.

High performance and variable installation – individually designed for your application profile

Air conditioning units from FrigorTec come in a wide product range, with a concise differentiation of specific performance features. We choose the exact device to fulfil your individual needs on location.

Your benefits:

- reliable cooling at ambient temperatures of up to +90 °C
- robust construction
- split designs allow for a variety of installation options
- versatile electrical arrangements regarding voltage, frequency, and current type


Tried and tested

The calculated performance data for the devices is tested in our technology department.

In this way, FrigorTec has produced air conditioning units for container/control cabinet and crane cabin cooling for over 60 years. Our devices are used successfully in around 100 countries.



Our air conditioning units for container, control cabinet, and crane cabin cooling are used for the most diverse and challenging requirements in harbours and container terminals all across the world.

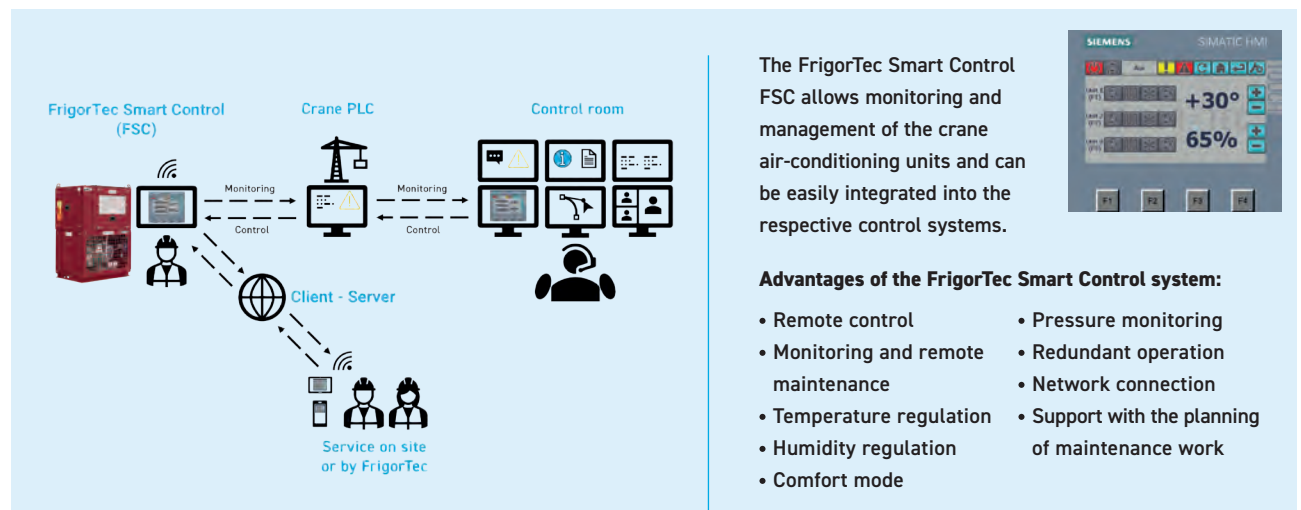

We pass on only what we have produced
by our own hands.



In the headquarters in Amtzell, Germany all products made by FrigorTec GmbH are developed, constructed and produced. Every device passes a quality inspection with test runs before delivery. FrigorTec solutions are sold in around 100 countries through our worldwide distribution network.

SERVICE (24 / 7)



Our service keeps the units maintained and ensures the spare parts supply - worldwide.
service@frigortec.com

Grain cooling
GRANIFRIGOR™

Crane air conditioning
CRANEFRIGOR™

Standard cooling
STANDARDFRIGOR

FrigorTec
SERVICES

Insect heat treatment
DEBUGGER

Hay dryer
AGRIFRIGOR™

Distributor:

FRIGOR TEC
Cooling to the point

FrigorTec GmbH · Hummelau 1
88279 Amtzell / Germany
phone: +49 7520 914820
tel.service: +49 7520 9148280
info@frigortec.com
frigortec.com

